

DESIGN DATA (EACH)	
Service	**1st / 2nd stage electrostatic desalting**
Size	**ID 3800 x 30000 T/T**
Design P / T	**17.0 barg / 165 C**
Operating P / T	**11.5 barg / 136 C**
Material	**SA-516-70, CA 3.0 mm, E = 1.0**
Shell / head t	**28 / 28 mm (req. 27.0)**
Hydrotest	**22.10 barg (shop, horizontal)**
Residence time	**27.7 min**
Volume	**355 m3**
Insulation	**50 mm**
Weight empty / oper. / test	**137 / 414 / 487 t**
Code	**ASME VIII Div.1, U-stamp**

PLAN 1:75

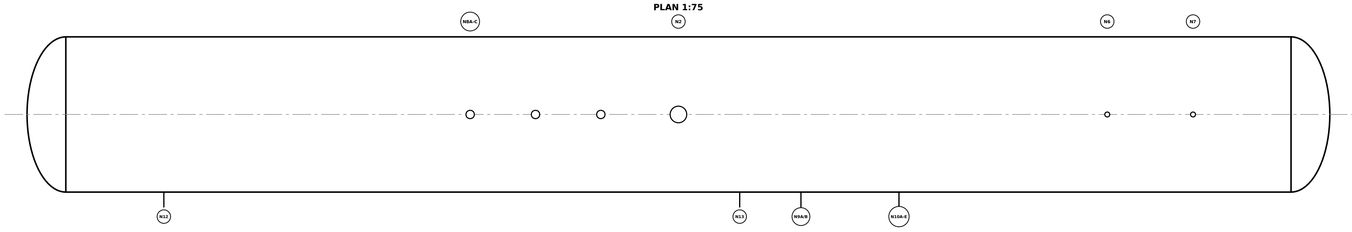

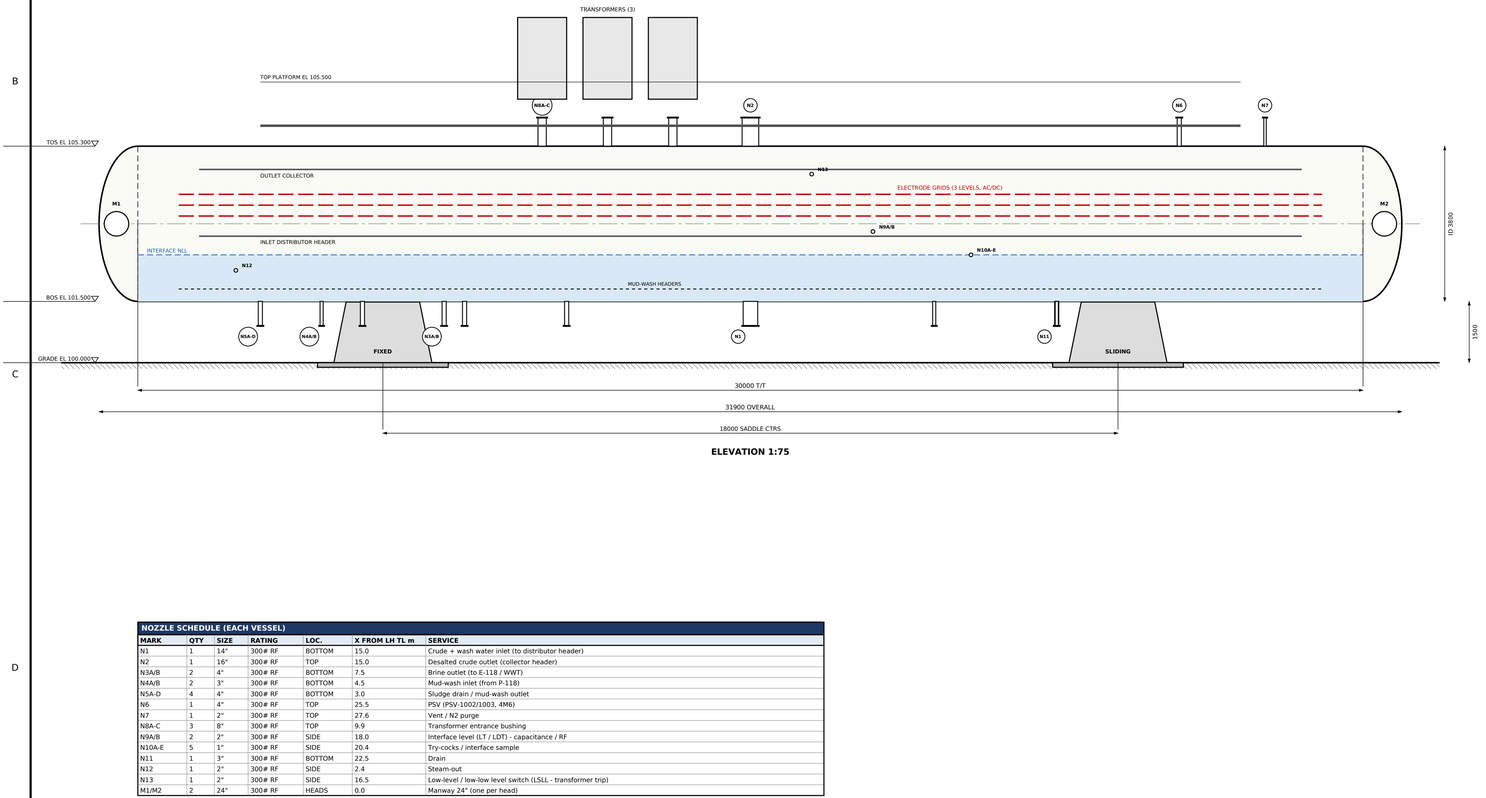

ELEVATION 1:75

SECTION A-A 1:40 (TYPICAL)

NOZZLE SCHEDULE (EACH VESSEL)						
MARK	**QTY**	**SIZE**	**RATING**	**LOC.**	**X FROM LH TL m**	**SERVICE**
N1	1	14"	300# RF	BOTTOM	15.0	Crude + wash water inlet (to distributor header)
N2	1	16"	300# RF	TOP	15.0	Desalted crude outlet (collector header)
N3A/B	2	4"	300# RF	BOTTOM	7.5	Brine outlet (to E-118 / WWT)
N4A/B	2	3"	300# RF	BOTTOM	4.5	Mud-wash inlet (from P-118)
N5A-D	4	4"	300# RF	BOTTOM	3.0	Sludge drain / mud-wash outlet
N6	1	4"	300# RF	TOP	25.5	PSV (PSV-1002/1003, 4M6)
N7	1	2"	300# RF	TOP	27.6	Vent / N2 purge
N8A-C	3	8"	300# RF	TOP	9.9	Transformer entrance bushing
N9A/B	2	2"	300# RF	SIDE	18.0	Interface level (LT / LDT) - capacitance / RF
N10A-E	5	1"	300# RF	SIDE	20.4	Try-cocks / interface sample
N11	1	3"	300# RF	BOTTOM	22.5	Drain
N12	1	2"	300# RF	SIDE	2.4	Steam-out
N13	1	2"	300# RF	SIDE	16.5	Low-level / low-low level switch (LSLL - transformer trip)
M1/M2	2	24"	300# RF	HEADS	0.0	Manway 24" (one per head)

NOTES

1. Dimensions in mm, elevations in m; grade EL 100.000.
2. D-101A (1st stage) and D-101B (2nd stage) identical; series flow, wash water to 2nd stage, brine recycle to 1st stage.
3. Internals (distributor, electrode grids, collector, mud wash) by desalter licensor/vendor.
4. Transformers on top platform; vessel liquid-full - LSLL trips transformers.
5. Thicknesses per CFU-000-ME-CAL-001; datasheet CFU-000-ME-DS-002.
6. One saddle fixed, one sliding (slotted holes, PTFE slide plate).

REV	DATE	DESCRIPTION
A	2026-10-02	Issued for review (FEED)

GENERIC REFINERY - GULF COAST
100 KBPSD CRUDE & VACUUM DISTILLATION UNIT

DESALTER GENERAL ARRANGEMENT

D-101A / D-101B ELECTROSTATIC DESALTERS (2-STAGE)

DISCIPLINE	STAGE	SCALE	SHEET
MECHANICAL	FEED	1:75 / 1:40	1 OF 1

DRAWN	CHECKED	APPROVED	DATE
CLAUDE CODE	-	-	2026-10-02

DRAWING NUMBER **CFU-100-ME-GA-007** REV **A**