


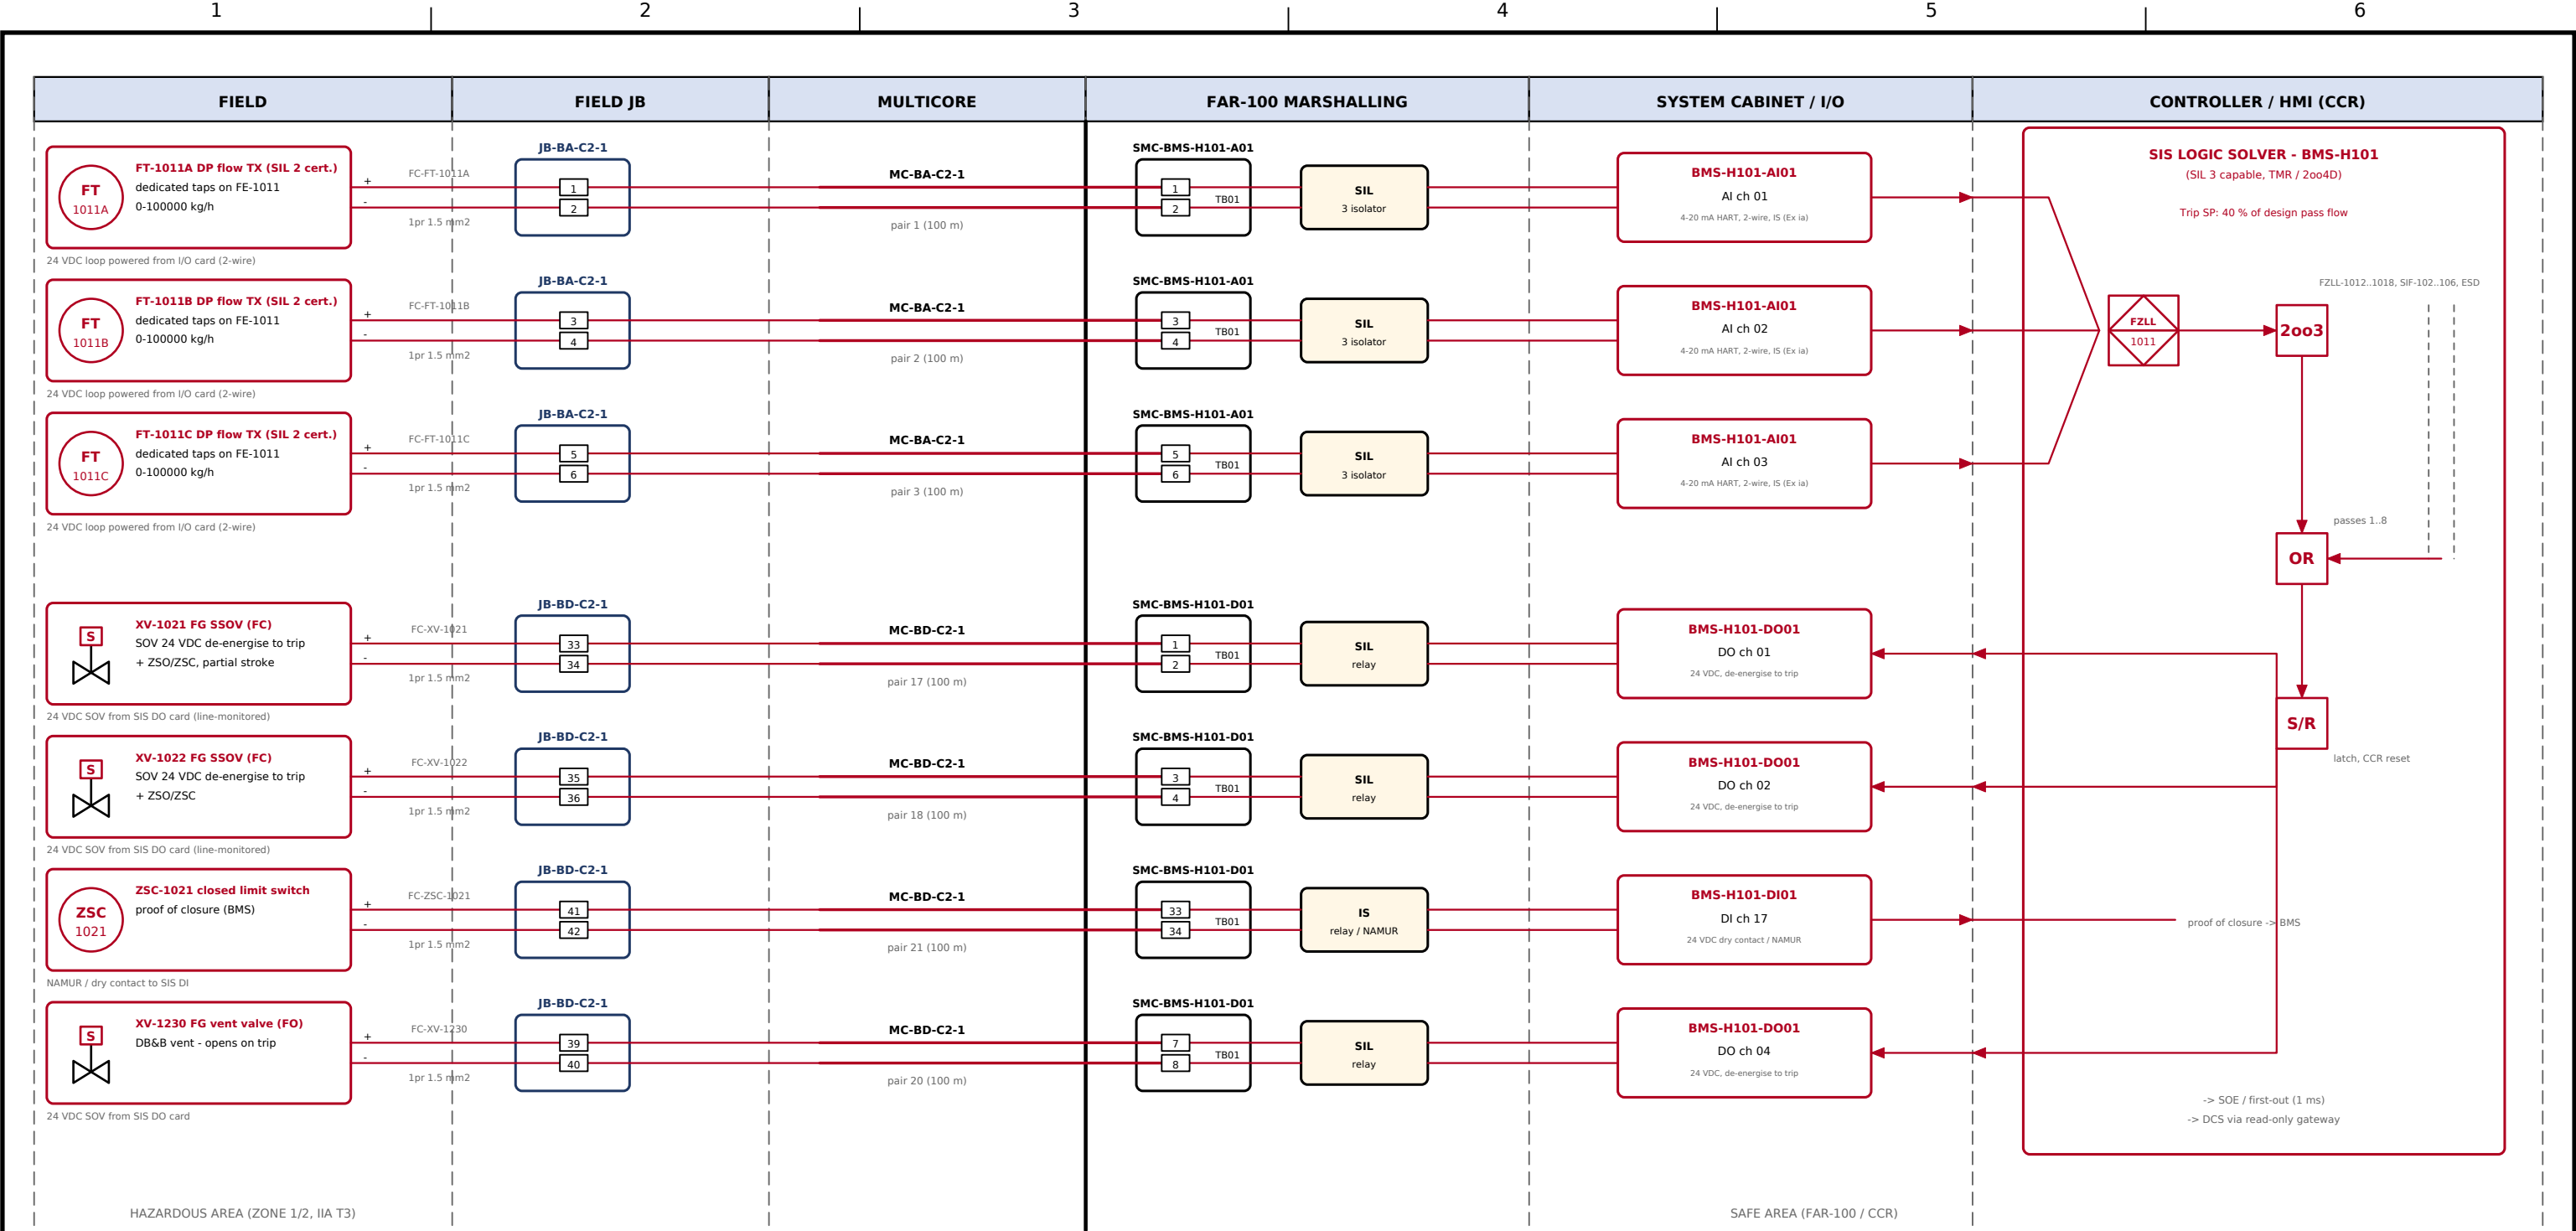

NOTES

1. SIL 2 per LOPA (CFU-000-IC-RPT-002). 2oo3 voting with 2oo2 on one transmitter in bypass / fault; deviation alarm between A/B/C (5 %).
2. Final elements: XV-1021 and XV-1022 in series (1oo2) with vent XV-1230 (double block & bleed); also pilot XV-1026 (SIF-101 / BMS). Proof-test interval 12 months (partial stroke 3 months).
3. Field cables and JB's for SIS are segregated (red sheath / labels); SIS multicores separate from DCS.
4. Terminal / cable data from CFU-000-IC-IOL-001 (data/io_list.json).

REV	DATE	DESCRIPTION
A	2026-10-02	Issued for review (FEED)
GENERIC REFINERY - GULF COAST 100 KBPSD CRUDE & VACUUM DISTILLATION UNIT		
LOOP DIAGRAM SIF-101 H-101 PASS 1 LOW-LOW FLOW (2003) -> FUEL SSOVS		
DISCIPLINE INSTRUMENTATION	STAGE FEED	SCALE NTS
DRAWN CLAUDE CODE	CHECKED -	APPROVED -
DRAWING NUMBER CFU-100-IC-LD-003		DATE 2026-10-02
		REV A