


C-201
Vacuum column (wet, packed)
ID 4.4 m (top) / 6.6 m (main) / 3.0 m (boot) x 36.0 m T/T
DESIGN PV: 3.5 barg / 435 C, CA 6 mm
4 packed beds (structured 250V/grid), 4 stripping trays, vapour horn
MATL: CS + 410S clad (317L clad flash/wash zone)

P-204A/B
Vacuum residue (incl. quench)
RATED 196 m³/h @ 187 m, dP 14 bar
MOTOR: 132 kW, API 682, Plan 538
DES. T 395 C, MATL: A-8 (316)

X-104
Corrosion inhibitor package (VDU OH)
Tank 2 m³ + 2 x 100 % metering pumps
MOTOR: 0.75 kW
MATL: SS316

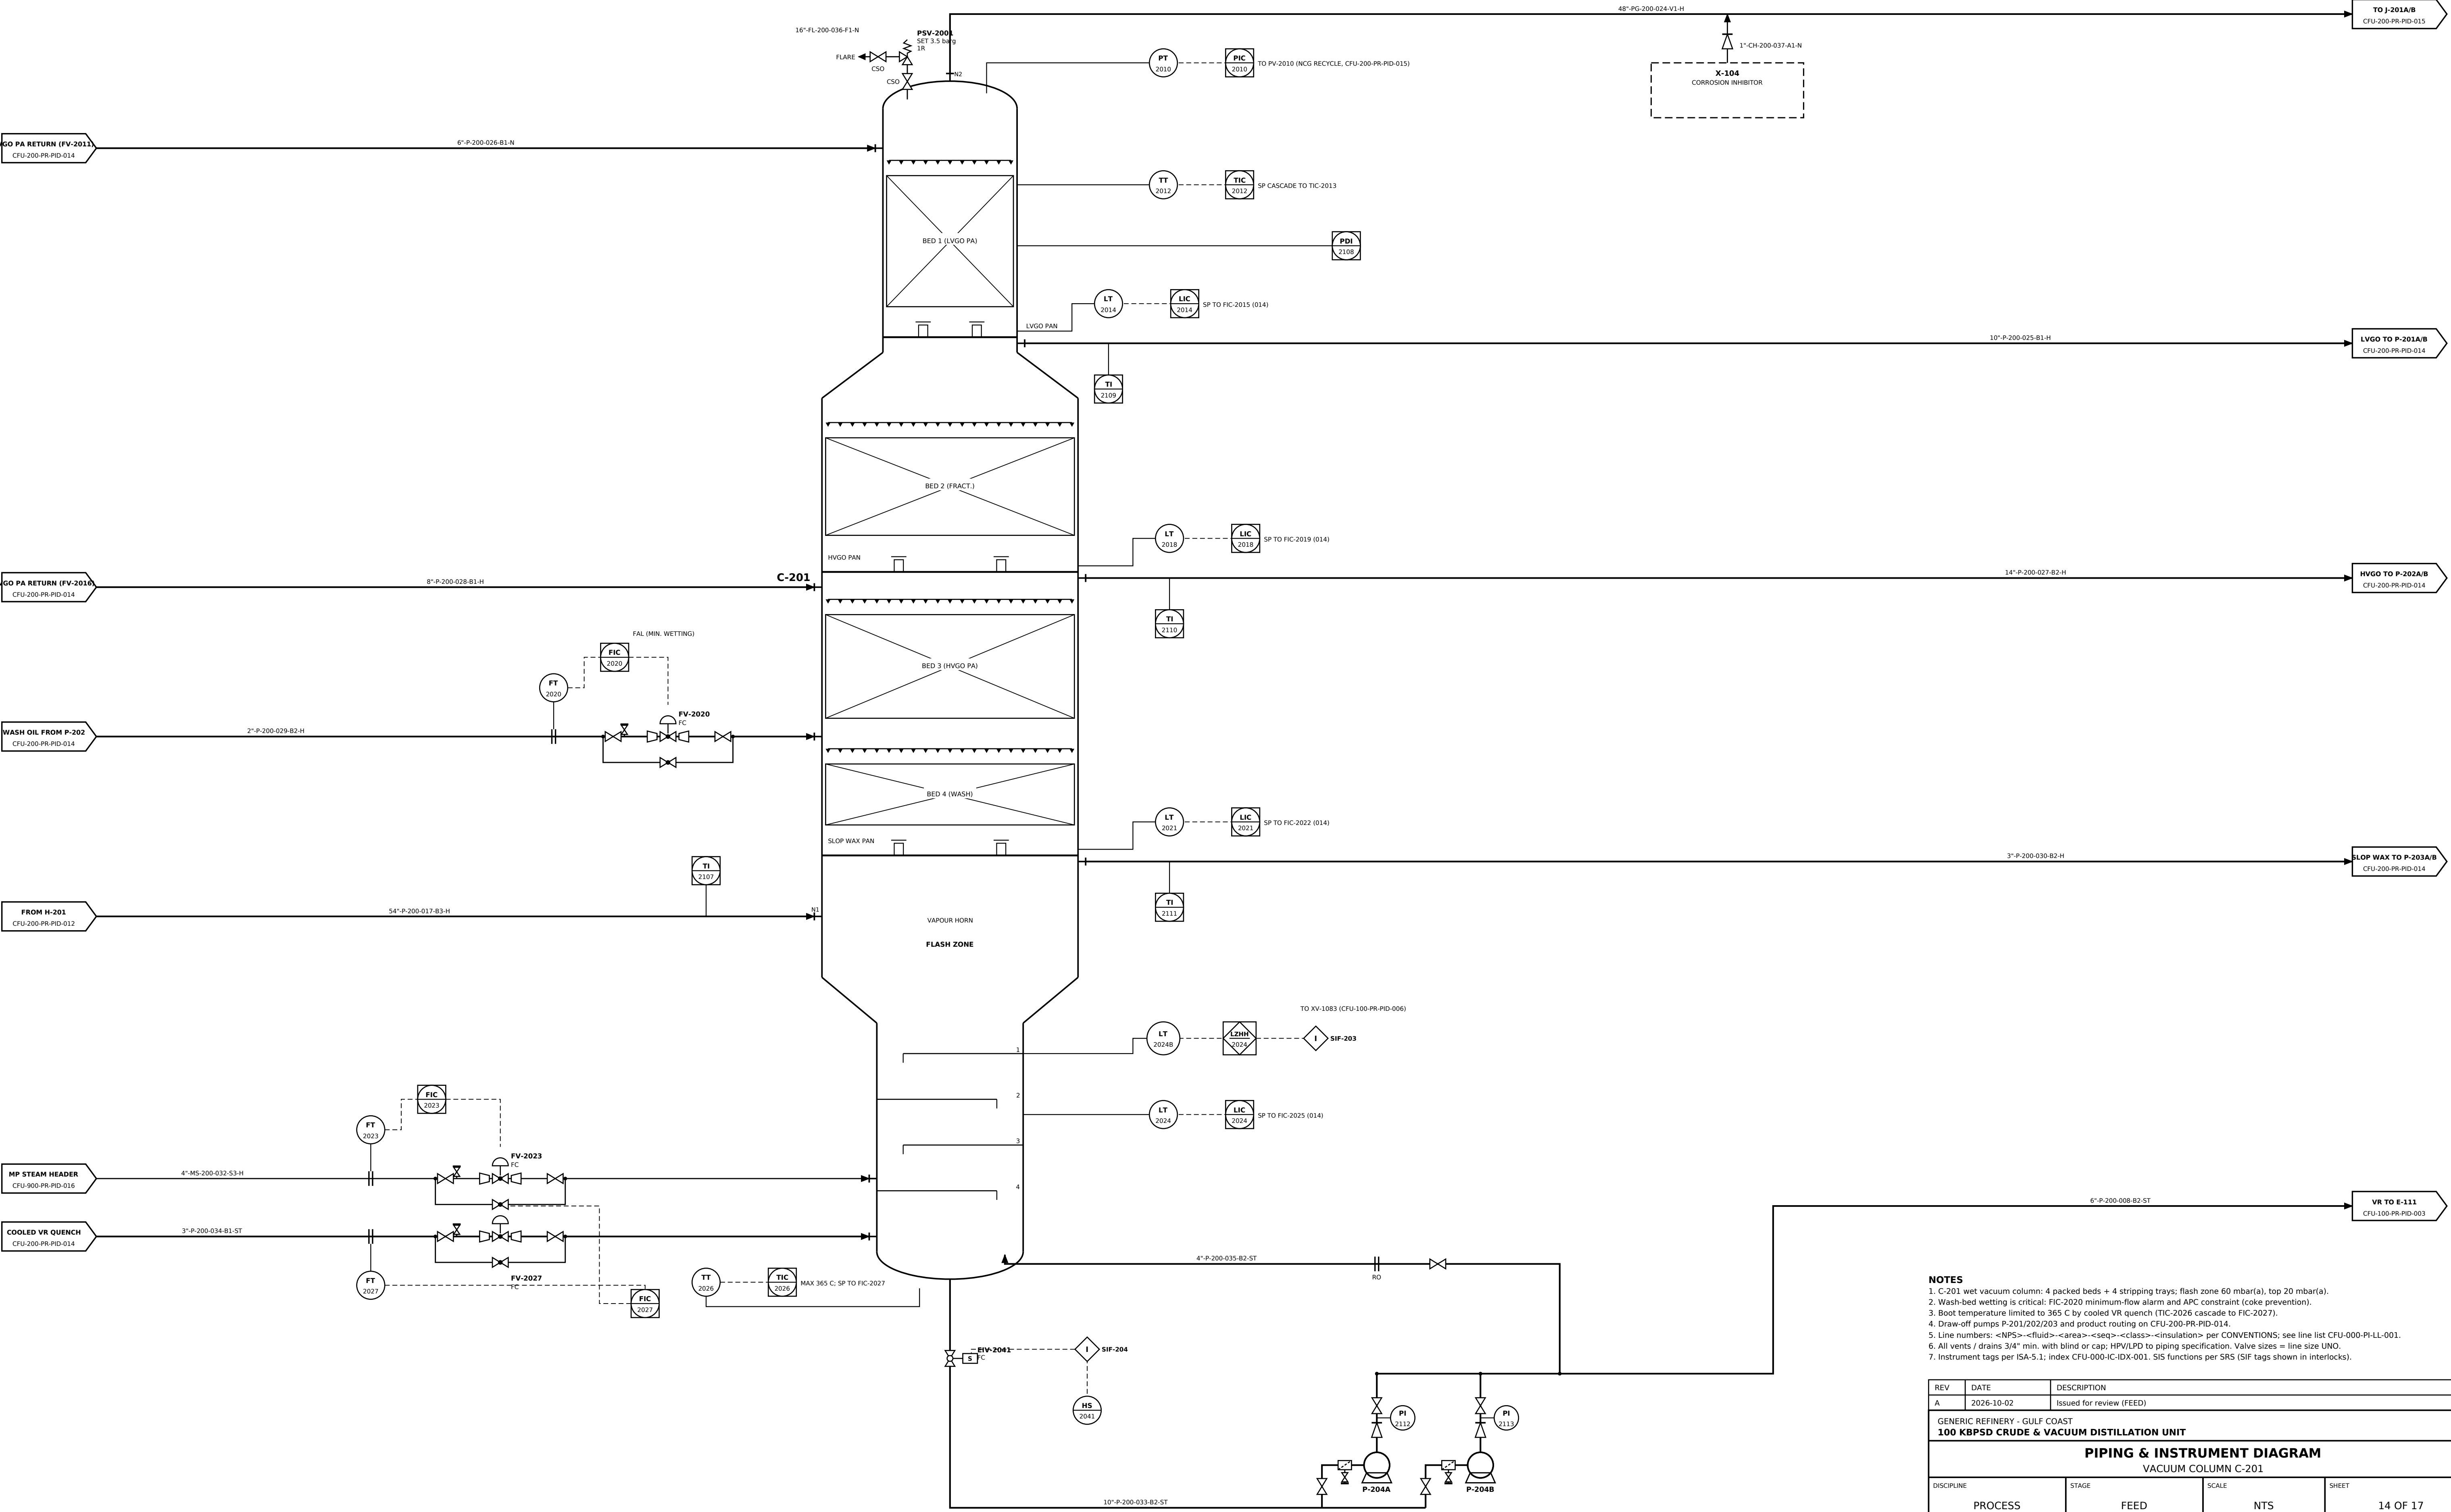

- NOTES**
- C-201 wet vacuum column: 4 packed beds + 4 stripping trays; flash zone 60 mbar(a), top 20 mbar(a).
 - Wash-bed wetting is critical: FIC-2020 minimum-flow alarm and APC constraint (coke prevention).
 - Boot temperature limited to 365 C by cooled VR quench (TIC-2026 cascade to FIC-2027).
 - Draw-off pumps P-201/202/203 and product routing on CFU-200-PR-PID-014.
 - Line numbers: <NPS>-<fluid>-<area>-<seq>-<class>-<insulation> per CONVENTIONS; see line list CFU-000-PI-LL-001.
 - All vents / drains 3/4" min. with blind or cap; HPV/LPD to piping specification. Valve sizes = line size UNO.
 - Instrument tags per ISA-5.1; index CFU-000-IC-IDX-001. SIS functions per SRS (SIF tags shown in interlocks).

REV	DATE	DESCRIPTION
A	2026-10-02	Issued for review (FEED)
GENERIC REFINERY - GULF COAST		
100 KBPSD CRUDE & VACUUM DISTILLATION UNIT		
PIPING & INSTRUMENT DIAGRAM		
VACUUM COLUMN C-201		
DISCIPLINE	STAGE	SCALE
PROCESS	FEED	NTS
		SHEET
		14 OF 17
DRAWN	CHECKED	APPROVED
CLAUDE CODE	-	-
		DATE
		2026-10-02
DRAWING NUMBER		REV
CFU-200-PR-PID-013		A